
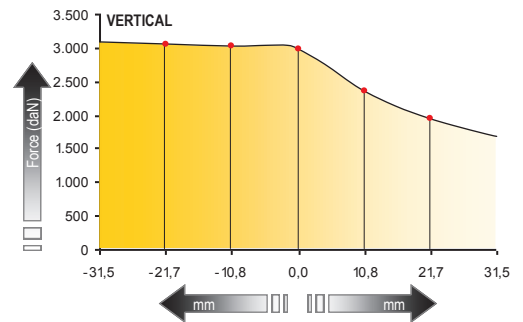


Model	A mm	B mm	C mm
RTRCS 3000x50	190	56	88
RTRCS 3000x80	220	86	118


Model	Smax mm	Max. punching force	Gas spring return force		Gas spring model	Max. working specifications		Max. width of driver	Kg
			Initial	Final		Velocity	Strokes / min		
RTRCS 3000x50-1	50	3000 daN	400 daN	≈ 600 daN	TPK 32x50	0,5 m/s	40	35 mm	8,60
RTRCS 3000x50-2			200 daN	≈ 270 daN	TPS 32x50				
RTRCS 3000x80-1	80	3000 daN	400 daN	≈ 600 daN	TPK 32x80	0,5 m/s	35	35 mm	9,40
RTRCS 3000x80-2			200 daN	≈ 270 daN	TPS 32x80				

Working Force Distribution

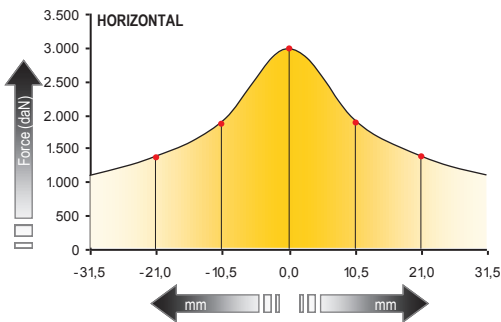

Maximum force that can be applied to the punch depending on eccentricity, so that the stress in the assembly is the same as it was when the punch was completely centred.

Maximum Incline

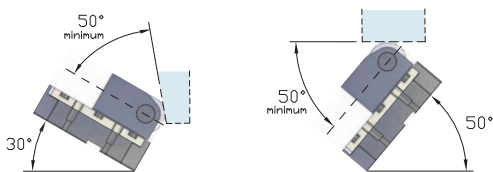

How to order

RTRCS 3000 x **50** - **1**

Model Stroke Gas spring model

1 - TPK series
2 - TPS series